

Carefree™

Standard Sand Filter Systems are designed and equipped to offer the ideal combination of energy efficient, trouble-free operation and crystal clear, sparkling water.

Features:

- Large sand filter bodies for extra-long filtering cycles and heavy-duty capacity
- Each system is designed for quick assembly and precise alignment of components
- Pump and filter performance matched to provide optimum flow and energy efficiency
- 7-position, threaded multi-port valve is easy to use and install
- High performance single and dual-speed pump
- Available with or without hoses, fittings and clamps needed for installation
- Standard one-piece pump and filter mounting base
- Long-lasting stainless steel pressure gauge



Part No.	Filter	Filtration	Flow Rate	Pump	HP	Pool Turnover		
						6 Hours	8 Hours	
522-5327-6S	19"	2.0 sq. ft.	45 GPM	SGPH2100-6	1.0	16,200	21,600 gal.	3 ft. cord, regular (NEMA) plug. Change (-6) on part number to (-3) for 3 ft. cord twist-lock plug. Pumps are 2-speed.
522-5337-6S	19"	2.0 sq. ft.	45 GPM	SGPH2150-6	1.5	16,200	21,600	
522-5347-6S	22"	2.6 sq. ft.	55 GPM	SGPH2150-6	1.5	19,800	26,400	
Part No.	Filter	Filtration	Flow Rate	Pump	HP	Pool Turnover		
						6 Hours	8 Hours	
520-5327-6S	19"	2.0 sq. ft.	45 GPM	SGPH1100-6	1.0	16,200	21,600 gal.	3 ft. cord, regular (NEMA) plug. Change (-6) on part number to (-3) for 3 ft. cord twist-lock plug. Pumps are 1-speed.
520-5337-6S	19"	2.0 sq. ft.	45 GPM	SGPH1150-6	1.5	16,200	21,600	
520-5347-6S	22"	2.6 sq. ft.	55 GPM	SGPH1150-6	1.5	19,800	26,400	
Part No.	Filter	Filtration	Flow Rate	Pool Turnover				
				6 Hours	8 Hours			
520-5327	19"	2.0 sq. ft.	45 GPM	16,200	21,600 gal.			
520-5347	22"	2.6 sq. ft.	55 GPM	19,800	26,400			



807-0094.0317

2200 East Sturgis Road, Oxnard CA 93030
 Phone 805.981.0262 • Fax 805.981.9403
waterway@waterwayplastics.com • www.waterwayplastics.com



**Designed,
 Engineered &
 Manufactured in the USA.**

©2017 Waterway Plastics

Carefree™

Carefree Series Filters and Hi-Flo Pumps are also available as individual units to custom design filtration requirements for new or existing pools. Choose the appropriate pump as well as system enhancing accessories, such as chlorine feeders.


Standard Sand Filter Systems

Specifications

Filter type:	High-Rate Sand: No. 20 Silica
Filter tank:	Roto-Molded Polymeric
Underdrain:	360° self-cleaning, slotted laterals - threaded for ease of maintenance
Control Valve:	7-position, top-mount, multi-port with lever-action handle
Valve Fastening:	Split-nut thread design
Pump & Motor:	Premium Blue Series pump - 115 volts
Mounting Base:	Molded thermoplastic



Above Ground
4-Tablet Chlorinator

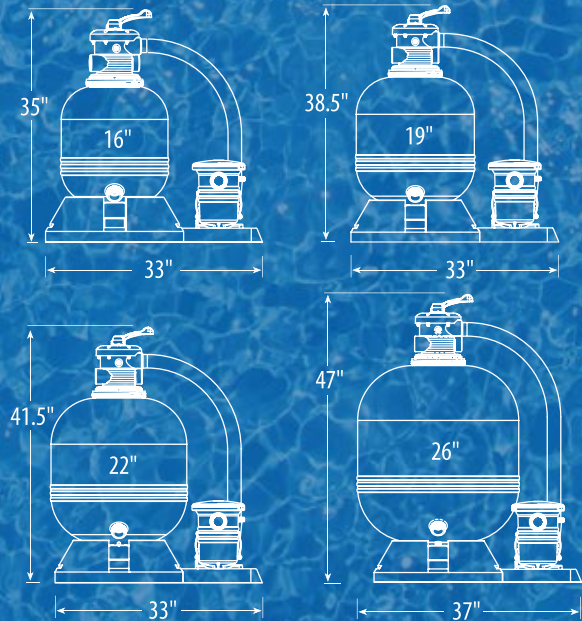

The Hi-Flo Pump was designed for superior and efficient performance. This pump features high flow rate performance for faster filtering cycles. The Hi-Flo is ideal for new installations or as a replacement pump.

- FEATURES:**
- 1 1/2" Union threads / 1 1/2" FPT Intake
 - 2" Union threads / 1 1/2" FPT discharge
 - Large 6" pump trap with clear lid
 - Powerful side discharge performance
 - Wet end rotates for easy installation



UL
LISTED
(SWIMMING POOL
OR SPA PUMP)
7J06



*Designed,
Engineered &
Manufactured
in the USA.*

Waterway™

2200 East Sturgis Road, Oxnard CA 93030
Phone 805.981.0262 • Fax 805.981.9403
waterway@waterwayplastics.com • www.waterwayplastics.com