



**Designed for high volume,
low pressure systems...**

the ideal choice for swim spas.



The Viper pool and spa pump features a 90° rotating wet end for full versatility and is available in 2, 3, 4 and 5 HP (Full Rated) models.

Waterway



Designed,
Engineered &
Manufactured
in the USA.



2-Speed Viper 56-Frame Pumps

Part No.	Description	HP	Volts	Amps High Speed	Amps Low Speed	Hz
3721221-1V	2 1/2" Intake - 2 1/2" Discharge	3	230	10	3.5	60
3721621-1V	2 1/2" Intake - 2 1/2" Discharge	4	230	12	4.4	60
3722021-0V	2 1/2" Intake - 2 1/2" Discharge	5	230	16.4	4.8	60




1-Speed Viper 56-Frame Pumps

Part No.	Description	HP	Volts	Amps	Hz
3711621-0V	2 1/2" Intake - 2 1/2" Discharge	4	230	12	60
3712021-0V	2 1/2" Intake - 2 1/2" Discharge	5	230	16.4	60

- Designed for low pressure, high volume systems
- Viper wet end designed specifically for 56-frame motors
- Large 8" diameter wet end allows for more volume
- Large 2 1/2" intake and discharge for improved flow performance and reduced noise
- Highly versatile wet end can be rotated every 90°
- 56-frame motor for added strength, cooler operating temperature and longer life

- Four sets of insulated windings for increased efficiency
- Two double shielded ball bearings with moisture resistant grease for quieter operation and longer life
- Split capacitor (start and run) for less energy consumption
- Thermally protected to extend life expectancy of motor
- Three year warranty on motor and wet end

Viper Performance Chart

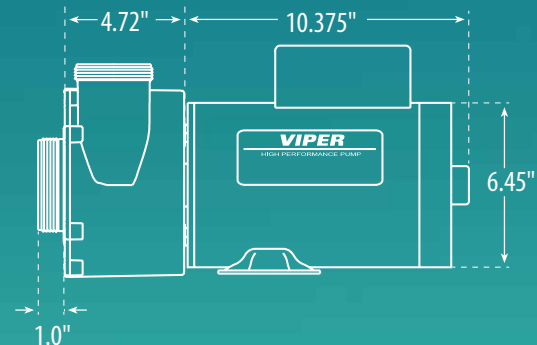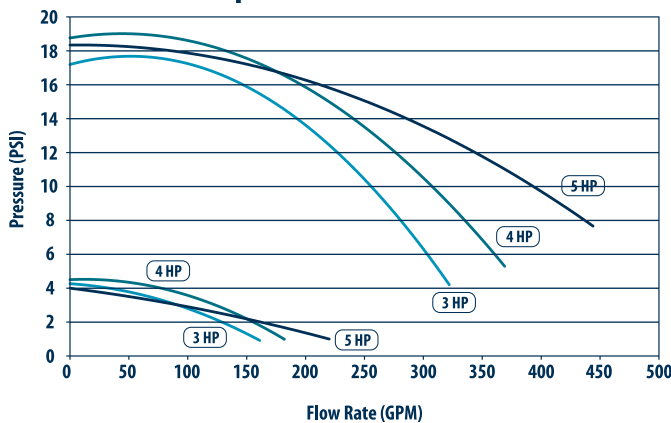

2200 East Sturgis Road, Oxnard CA 93030
 Phone 805.981.0262 • Fax 805.981.9403
waterway@waterwayplastics.com • www.waterwayplastics.com



**Designed,
 Engineered &
 Manufactured
 in the USA.**